


# WORKGROUP **COLOR** Multifunctional Solution

The MFX-C3035 is a robust, cost-effective color MFP solution to satisfy the document workflow demands of workgroups, branch offices and small to mid-size businesses.

The MFX-C3035 comes equipped with standard:

- › 31 page-per-minute color & monochrome output
- › High-Definition toner, enhanced auto image density control
- › Flexible OS support – Windows, Mac & Linux
- › 50-sheet reversing document feeder / legal-size platen glass
- › Exceptional paper handling
- › Enhanced security features, ISO 15408 certified
- › Color scanning to e-mail, PC folder, FTP and USB host drive
- › Standard high-speed super G3 fax, Internet faxing and PC faxing
- › Bright 4.3" color touch screen with simple icon display
- › Green technologies to reduce emissions, energy usage and paper consumption

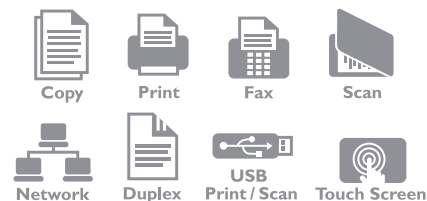

# FEATURES AND BENEFITS

## Exceptional color output

- › The high-definition color print engine produces exceptional color output at up to 31 pages-per-minute
- › To produce brilliant, spectacular images through long print/copy runs, enhanced color calibration maintains consistent output without hands-on adjustments
- › Smooth halftone gradation makes photos look more natural – and edge enhancement gives color characters greater legibility

## 50-sheet reversing automatic document feeder / legal-size platen glass

- › Enables copying, scanning or faxing of large jobs without having to separate them into multiple sets
- › Platen glass enables the copying, scanning or faxing of documents that are not appropriate for the document feeder
- › Supports mixed-original detection (letter/legal)

## Flexible paper configuration

- › Standard 250-sheet front-loading paper cassette
- › Standard 100-sheet multipurpose bypass tray is the perfect solution for producing envelopes, letterhead, labels, postcards and specialty graphics
- › Up to (2) additional 500-sheet paper cassettes can be added for increased handling and performance (1,350-sheet maximum capacity)

## Intuitive operation

- › 4.3" touch screen interface enables seamless job programming and machine operation

- › *EasyChange<sup>SM</sup>* consumables can be easily accessed and changed without any hassle or clean-up

## Dynamic document delivery

- › Quickly digitize documents for delivery to e-mail addresses, FTP sites, PC folders and USB flash drives
- › Scan documents in PDF, TIFF, JPEG and XPS formats
- › Effortlessly send fax documents at up to 3 seconds-per-page

## Advanced security solutions

- › HDD overwrite (choose from 8 modes) and encryption
- › Secure print
- › User authentication including device password protection, HID card authentication (optional), network authentication (Active Directory) and more.
- › Enable/disable USB printing and scanning
- › PDF scan encryption
- › IPv6 support
- › ISO 15408 Certified
- › IP Filtering & SSL Support

## Environmental performance

- › The MFX-C3035 has received EnergyStar certification in recognition of responsible energy usage
- › Green technologies, such as our specialized polymerized toner, allow for less waste, lower emissions and a more efficient use of resources
- › Standard duplex printing reduces paper consumption

# SPECIFICATIONS – MFX-C3035

| GENERAL                             |  |
|-------------------------------------|--|
| Recording Method                    | Laser  |
| Color Print Speed                   | 31 pages-per-minute  |
| Monochrome Print Speed              | 31 pages-per-minute  |
| User Interface                      | 4.3" touch screen  |
| Reversing Automatic Document Feeder | 50 sheets  |
| Standard Paper Capacity             | 350 sheets (includes 100-sheet bypass tray)  |
| Max. Paper Capacity                 | 1,350 sheets   |
| Cassette Paper Weight               | 16 – 110 lb.   |
| Bypass Paper Weight                 | 16 – 110 lb.   |
| Duplex Printing                     | Standard 1:2, 2:2  |
| Duplex Scanning                     | Automatic  |
| Output Tray Capacity                | 250 Sheets   |
| Dimensions (H x W x D)              | 21.7" x 20.9" x 20"  |
| Weight                              | 86 lbs.  |
| Toner Yield (Black)                 | 6,000 impressions*   |
| Toner Yield (Yellow, Cyan, Magenta) | 6,000 impressions*   |
| Drum Yield                          | 30,000   |
| Ethernet Connection                 | Standard 10/100 BaseT, RJ-45 Connection  |
| Supported Network Protocols         | TCP/IP v4, TCP/IP v6, SMTP, POP 3, HTTP, SNMP v1/v3, DHCP, DNS, LPR, Port9 100, BOOTP, ARP, FTP, CIFS, LDAP, SLP, Bonjour, Web Services Discovery, NetWare, EtherTalk, NetBEUI |
| LDAP Support                        | Standard   |
| Local Connection                    | Standard USB 2.0   |
| Memory                              | 1.5 GB, 120 GB HDD   |
| COPY                                |  |
| Platen Glass                        | 8.5" x 14"   |
| First-Copy-Out-Time                 | 10.1 seconds (mono), 12 seconds (color)  |
| Warm-Up Time                        | 45 seconds   |
| Image Combination                   | 2:1, 4:1, Card Copy  |
| Zoom Ratio                          | 25 – 400% (1% increments)  |

| Number of Copies                  | 1 – 999  |
|-----------------------------------|--|
| Mixed Copy Support                | Letter / Legal   |
| SCAN                              |  |
| Resolution                        | 600 x 600 dpi  |
| Scan to E-mail                    | Standard   |
| Scan to PC Folder                 | Standard   |
| Scan to FTP                       | Standard   |
| Scan to USB                       | Standard   |
| Scan File Formats                 | PDF, TIFF, JPEG, XPS   |
| Color Scan Speed                  | 2 seconds-per-page (300 dpi)   |
| Monochrome Scan Speed             | 2 seconds-per-page (300 dpi)   |
| TWAIN Compliant                   | Standard   |
| PRINT                             |  |
| Resolution                        | Up to 600 x 600 dpi  |
| Page Description Language         | Standard PCL 5c / 6 & PostScript 3, XPS  |
| Client OS Support                 | Windows 2000, Vista, XP, 7, Server 2008 and Server 2003; Mac Support – OS 10.3.9 to 10.6 |
| Print Alignment                   | Upper Left Corner  |
| SECURITY (Some Features Optional) |  |
| HDD Overwrite                     | 8 modes  |
| HID Authentication                | Optional   |
| Network Authentication            | Active Directory, LDAP   |
| IPv6 Support                      | Standard   |
| PDF Scan Encryption               | Standard   |
| USB Enable / Disable              | Standard   |
| Secure Print                      | Standard   |
| FAX                               |  |
| Modem Speed                       | 33.6 Kbps  |
| Max. Compression                  | JBIG   |
| Fax Address Book                  | 2,000 locations  |
| Broadcasting                      | 500 locations  |
| Group Dialing                     | 100 locations  |
| Fax Forwarding                    | Standard   |
| Confirmation Report               | Yes  |

\* Based on ISO 19798.



As an ENERGY STAR® partner, Murata Machinery, Ltd. has determined that these products meet the ENERGY STAR® guidelines for energy efficiency. Muratec and the Muratec logo are trademarks and/or registered trademarks of Murata Machinery, Ltd. or its subsidiaries in the United States and other countries. Other names, such as those of products of other companies, are the trademarks or registered trademarks of their respective companies. All specifications subject to change without notice.



Muratec America, Inc.  
3301 East Plano Parkway, Suite 100, Plano, TX 75074  
For more information on Muratec products or services, call (469) 429-3300 or visit our web site at [www.muratec.com](http://www.muratec.com)